
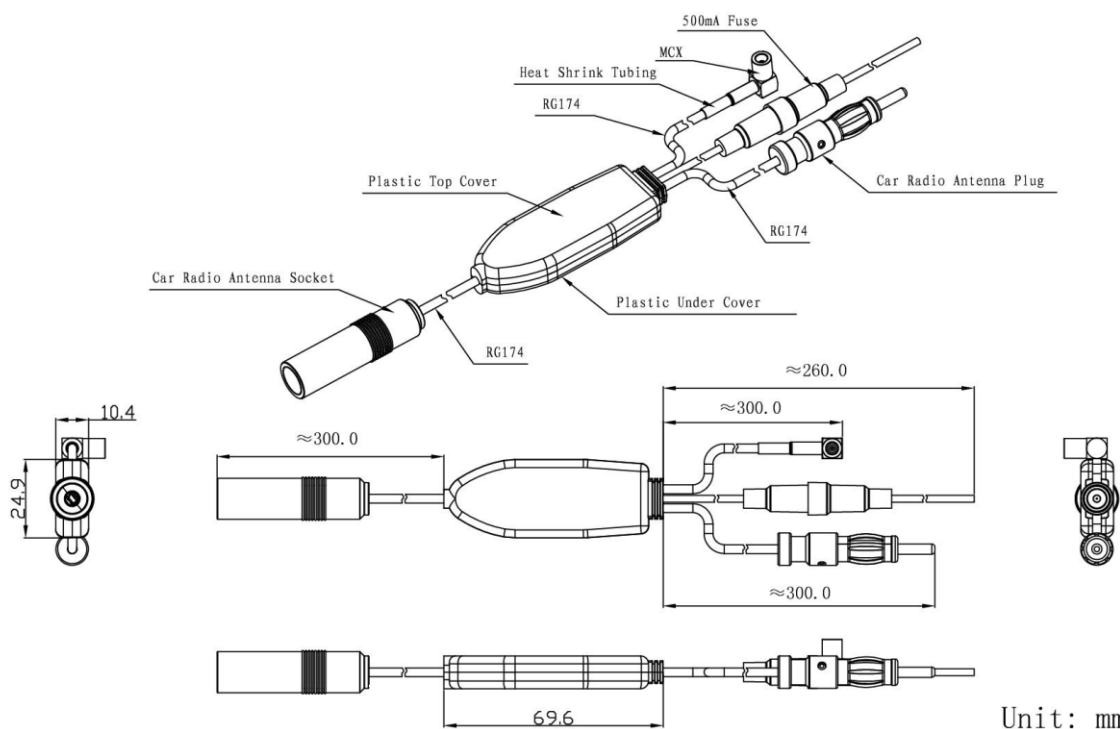


Artnr: 202-858

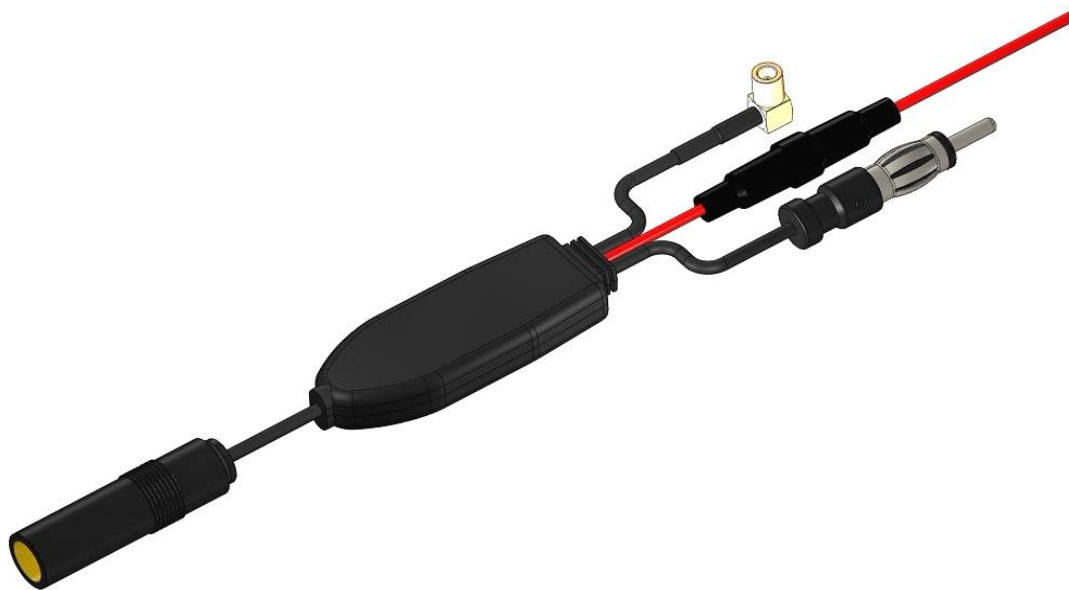

Unit: mm

## Item Specifications

Frequency range	525~1605KHz/88~108MHz/174~237MHz
Wave Band	DAB BIII /AM/FM
Impedance	50 ohm
Gain AM/FM	10±2dB DAB:20±2dB
VSWR	<2.0
Noise figure	<3.0
Supply voltage	9~24 V DC
Current Consumption	26~28mA
Mechanical Cable	RG316 4 m
Fuse	500mA
PCB	FR4
Connector	SMB-Right angle female
Plastic housing	ABS
Environmental Operating Temp.	-40°C~+85°C
Relative Humidity	Up to 75%
Vibration	10 to 55Hz with 1.5mm amplitude 2hours
Environmentally Friendly	ROHS Compliant