


Cable	RG316/U
OD	ø2.6±0.2mm
Cover	Black
SMB F	Gold-plated

Frequency	700~960MHz
	1710~2170MHz
	2.6G~2.7G

ROHS

ISO 9001
ISO 14001

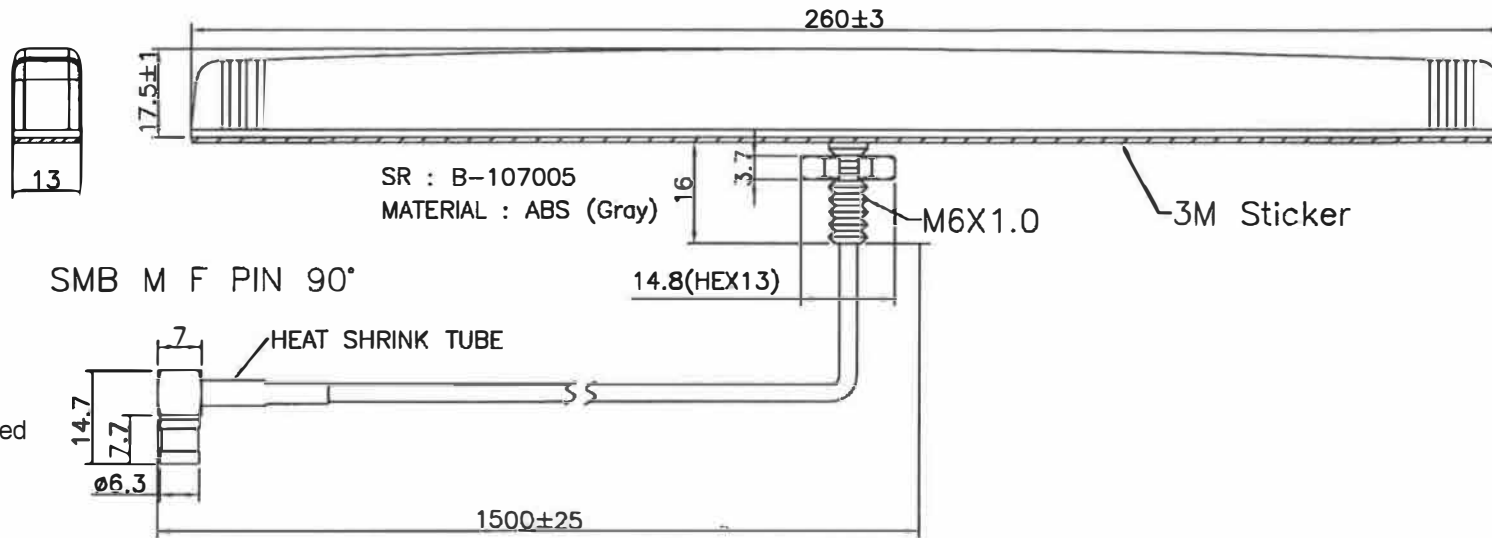

Angitte mål gjelder SMB-Hun vinkel, avviker noe fra denne med SMB-Hun -->

Material:		Treatment:		TRANSVOICE			
Drawer	Design	Aprov	Tolerance	Unit: mm		TITLE	
			X=±0.5 Y=±0.2 Z=±0.1 .XXX=±0.05	Ver: A	Scale 1:1	Model NO	203-052
Part NO				File NO: QR0402	Drawing NO	100-27001-0164	