


7/16-Stecker / 7/16-Plug

Artikel Nr. / Part-no.: 7380

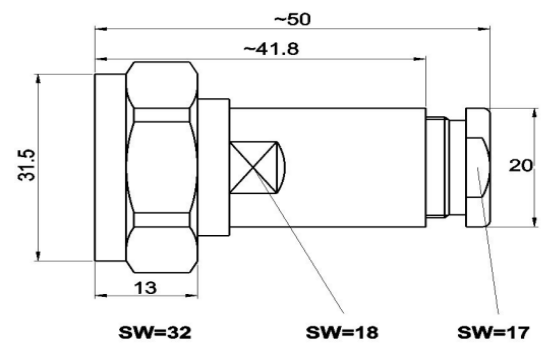

Alle Angaben in mm / All dimensions are in mm
 Pin 1: Loch / hole: \varnothing 3 mm / Pin 2: Loch / Hole: \varnothing 2,8 mm

Norm: IEC 60 169-4

Kabeltypen / Cable Types: Aircom Premium / H1000 / H2000 Flex / LMR 400 / RG 213

Mechanische Eigenschaften / Mechanical specifications:

Isolierhülse / Isolator	PTFE
Anpressdichtung / Gasket	Gummi / Rubber
O-Ring / O-ring	Gummi / Rubber
Dichtung Steckergesicht / Gasket in mating face	-
Oberfläche / Surface	vernickelt / nickel plated
Metallteile außer Pin / Metal parts excl. pin	CuZn39Pb3
Pin (diamagnetisch) / Pin (diamagnetic)	Vernickelt / nickel plated
Temperaturbereich / Operating temperature	
Gewicht / Weight	106g
RoHs conform / RoHs compliant	Ja / Yes
Schutzklasse / Protection class	IP 67

Elektrische Eigenschaften / Electrical specifications:

Betriebsspannung / Working voltage	\leq 2700 V RMS
Impedanz / Impedance	50 Ω
Isolationswiderstand / Isulation resistance	\geq 10 G Ω
Frequenz bis zu / Frequency up to	6 GHz
Durchgangswiderstand innen / Inner contact resistance	\leq 0,4 m Ω
Durchgangswiderstand außen / Outer contact resistance	\leq 1,5 m Ω