


TYCO 52 PIN CONNECTOR		
PIN	DESCRIPTION	I/O
1	CAN B H	BI-DIRECTIONAL
2	CAN C H	BI-DIRECTIONAL
3	NC	
4	CAN B H	BI-DIRECTIONAL
5	CAN C H	BI-DIRECTIONAL
6	AUDIO1-AUX AUDIO IN RIGHT	
7	AUDIO1-AUX AUDIO IN COM	GND
8	AUDIO2-AUDIO INPUT RIGHT (REMOTE CD)	I
9	AUDIO2-AUDIO INPUT REFERENCE (REMOTE CD)	I
10	AUDIO2-AUDIO INPUT LEFT (REMOTE CD)	I
11	CAN B L	BI-DIRECTIONAL
12	CAN C L	BI-DIRECTIONAL
13	NC	
14	CAN B L	BI-DIRECTIONAL
15	CAN C L	BI-DIRECTIONAL
16	AUDIO1-AUX AUDIO IN LEFT	I
17	AUDIO1-AUX DEVICE DETECT	I
18	AUDIO 1-AUX SHIELD	GND
19	AUDIO 2 RSE CD SHIELD	GND
20	NC	
21	VIDEO2-RVC VIDEO 2 INPUT (CAMERA SIGNAL)	I
22	VIDEO2 RVC VIDEO 2 INPUT (CAMERA GND)	I
23	VIDEO2-RVC VIDEO 2 INPUT (CAMERA SHIELD)	I
24	UART Tx-DIAGNOSTICS ONLY	
25	UART Rx-DIAGNOSTICS ONLY	
26	MFG TOO ALIGNMENT	0

DETAIL H
SCALE: 4/1
TYCO PART NUMBER
C-2898978

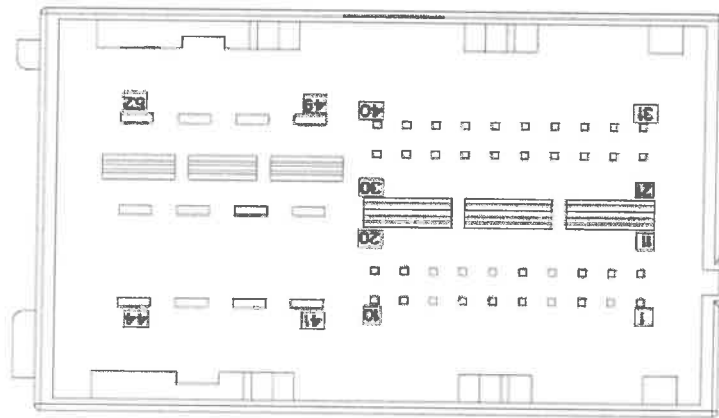

TYCO 52 PIN CONNECTOR			
PIN	DESCRIPTION	I/O	
27	NC		
28	NC		
29	MICROPHONE 1-IN	I	
30	MICROPHONE 1-IN	I	
31	VIDEO1-RVC VIDEO 1 INPUT (CAMERA SIGNAL)	I	
32	VIDEO1-RVC VIDEO 1 INPUT (CAMERA GND)	I	
33	VIDEO1-RVC VIDEO 1 INPUT (CAMERA SHIELD)	I	
34	UART Tx-DIAGNOSTICS ONLY (MAIN CPU)		
35	UART Tx-DIAGNOSTICS ONLY (MAIN CPU)		
36	NC		
37	NC		
38	NC		
39	MICROPHONE 2-IN	I	
40	MICROPHONE 2-IN	I	
41	AMP REMOTE ENABLE	O	
42	ENGINEERING LINE (1-15)	I	13.8V TYP
43	BATTERY GND		
44	BATTERY FEED	I	13.8V TYP
45	RR+	O	
46	FR+	O	
47	FL-	O	
48	RL+	O	
49	RR-	O	
50	FR-	O	
51	FL-	O	
52	RL-	O	